


ACSO 2

L602.

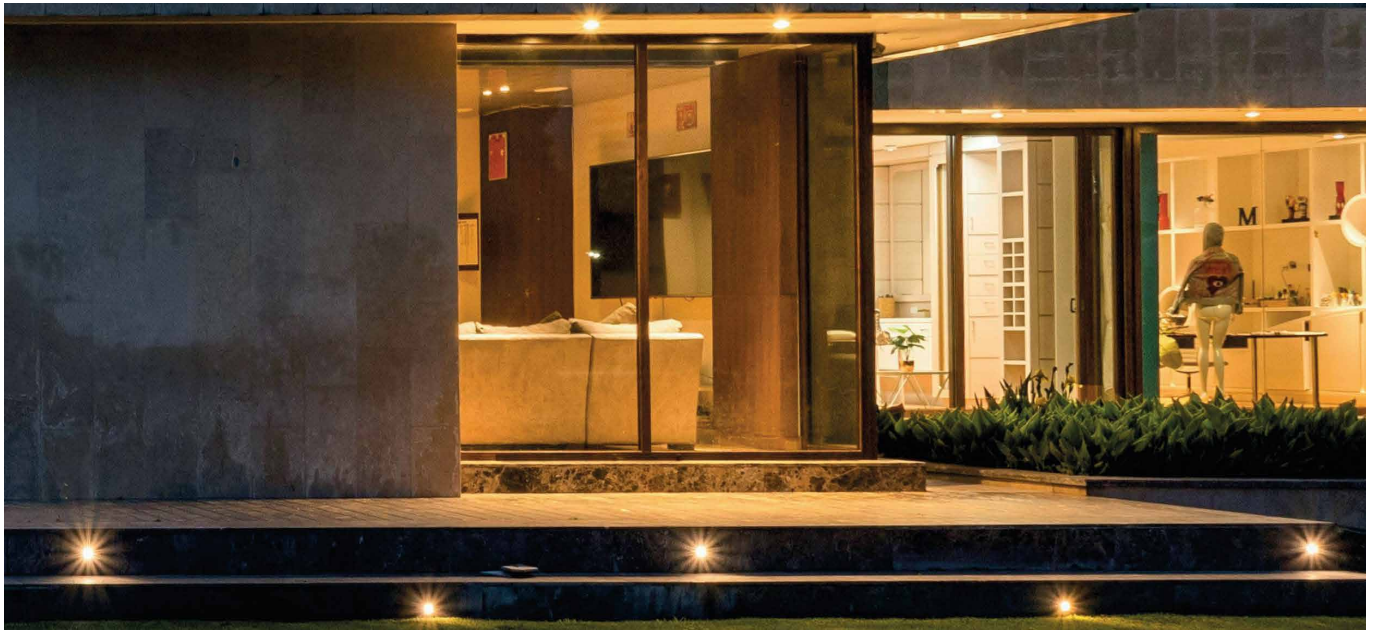

Flush-fitted in polished 304 stainless steel with power LED for accent and step marker lighting. Opal diffuser. Can be fitted in the floor or on the wall indoors and outdoors, mounting with formwork.

Power LED CRI>80

Power: 4W@350mA - 8W@500mA

Lumen: 540lm@350mA - 864lm@500mA


350mA - 500mA constant current power supply

Series connection, 50 cm cable


Constant voltage power supplies p. 232 - 233

Installation accessories page 270

Dimming Accessories page 249



 **MADE IN ITALY**










BASIC CODES

L602.

LIGHT BEAM

 **R4** Radial 4 apertures

LED COLOUR

 **BN** 4000K
 **BC** 3000K
 **CC** 2700K
 **BL** Blue
 **VE** Green
 **RO** Red
 **AM** Amber

POWER

3 4x1W - 350mA - 540 lm
5 4x2W - 500mA - 864 lm

Code example:

ACSO 2 + radial light beam 4 apertures + 3000K + 4W = Code: L602.R4BC3