



Decorated anodised aluminium lamp complete with press-fit brushed diffuser, side supports and LED source with high Lumen/Watt ratio. Possibility of integrating an on/off Touch system into the edge. Suitable for furnishing lighting and general lighting.

Constant 24Vdc voltage supply Parallel connection, 50 cm cable

Constant voltage power supplies page 237 Dimming Accessories page 249






















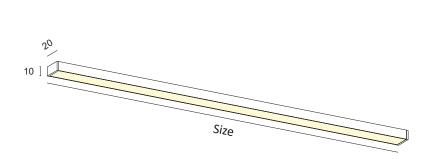



BASIC CODES	FINISHES	SIDE SUPPORTS S	SIDE SUPPORTS + TOUCH	SIZE
C2.	☐ 1 White ☐ 2 Matt black ☐ 7 Brushed aluminium *Other finishes on request.		□ 1T White □ 2T Matt black □ 7T Brushed aluminium	A 300mm B 450mm C 500mm D 600mm F 800mm G 900mm H 1000mm J 1200mm J 1300mm K 1400mm L 1500mm M 1800mm N 2000mm O 2300mm P 2500mm Q 2800mm R 3000mm
	LED COLOUR	POWER		DIFFUSER
	BN 4000K BC 3000K CC 2700K *Strip also available coloured, Dynamic White, RGB.	E 16.8W/m 2000Lm/m 140LED E+ 16.8W/m 2000Lm/m 140LED F 20.2W/m 2500Lm/m 168LED F+ 20.2W/m 2500Lm/m 160LED G 25W/m 3500Lm/m 160LED L+ 28W/m 3500Lm/m 160LED C2+15W/m 1550Lm/m COB LI *Energy class refer	I/m S2835 CRI>90 D	S BRUSHED

Code example:

C2 + White + Side supports white + C2 + 1000mm + 3000K + 16.8 W/m CRI>85 + Brushed diffuser = Code: C2.11HBCES

ACCESSORIES TO BE ORDERED SEPARATELY



Magnetic adhesive tape for anodised aluminium profiles. Supplied on a 10-metre reel, 1.2 mm thickness. (Force of attraction >40g/cm².)

Double-sided adhesive tape for aluminium profiles and LED strips. Supplied on a 50-metre reel.

www.nanoledlighting.com 181