
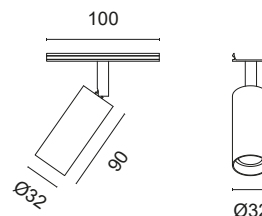


COMPLEMENTARY SYSTEMS REM

Ø32mm anodised aluminium directional projector decorated with CRI>90 LEDs for spot, decorative or courtesy lighting. Choice of secondary optics, can be installed indoors, with concealed faceplate on Delta or Kappa pendant, Delta or Kappa flush ceiling light, or flush-mounted Delta or Tau.

N.B. positioning, switch on management and other details to be defined in the order.

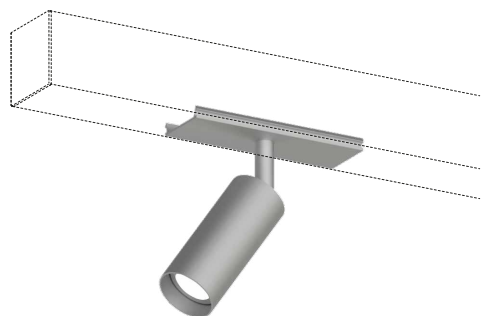

BASIC CODES

RG1.

FINISHES

- 1** White
- 2** Matt black
- 7** Brushed aluminium
- 9** Polished gold

LIGHT BEAM

- 15** 15°
- 25** 25°
- 35** 35°

LED COLOUR

- BN** 4000K
- BC** 3000K
- CC** 2700K
- BL** Blue
- VE** Green
- RO** Red
- AM** Amber

POWER

- 3** 1x2W
500mA - 216 lm
- 5** 3x2W
500mA - 648 lm

Code example:

REM + White + Light Beam 15° + 4000K + 2W = Code: RG1.115BC3