EOS RGB








Flush-fitted in thermoplastic with power RGB for accent, decoration and courtesy lighting. Choice of secondary optics, can be installed indoors, press-fit.

Power LED CRI>80 Power: 3W@350mA

350mA constant current power supply Series connection, with 70 + 70 cm cables

Accessories for RGB management page 249



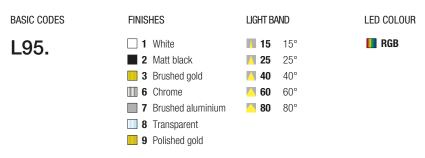

Code example:

EOS RGB + Brushed Aluminium + 15° light beam + RGB = Code: L95.715RGB

www.nanoledlighting.com 217