nancled




Decorated anodised aluminium lamp complete with press-fit brushed diffuser, side supports and LED source with a high Lumen/Watt ratio. Suitable for furnishing lighting and general lighting.

Mounting with magnets, included in the package.

Constant 24Vdc voltage supply Parallel connection, 50 cm cable

Constant voltage power supplies page 237 Dimming Accessories page 249

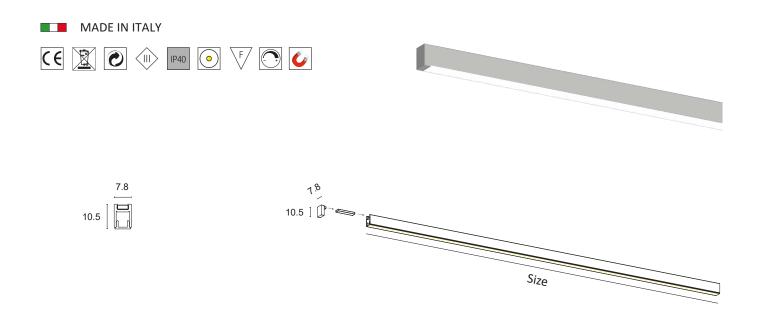



FINISHES	SIDE SUPPORTS	SIZE	LED COLOUR
1 White 2 Matt black 7 Brushed aluminium *Other finishes on request.	1 White 2 Matt black 7 Brushed aluminium	A 300mm B 450mm C 500mm D 600mm E 700mm F 800mm G 900mm H 1000mm I 1200mm J 1300mm K 1400mm L 1500mm M 1800mm N 2000mm O 2300mm P 2500mm Q 2800mm	BN 4000K BC 3000K CC 2700K
0+ 12W/m 1000Lm/m 300LED/m S P+ 14.4W/m 1100Lm/m 180LED/m S	2216 CRI>90 F A 2216 CRI>90 G A	DIFFUSER S BRUSHED	
	□ 1 White ■ 2 Matt black □ 7 Brushed aluminium *Other finishes on request. POWER N+ 9.6W/m 800Lm/m 120LED/m S O+ 12W/m 1000Lm/m 300LED/m S P+ 14.4W/m 1100Lm/m 180LED/m S	□ 1 White □ 2 Matt black □ 7 Brushed aluminium *Other finishes on request. POWER N+ 9.6W/m 800Lm/m 120LED/m S2216 CRI>90 F A G G G G G G G G G G G G G G G G G G	1 White 1 White A 300mm 2 Matt black 2 Matt black B 450mm 7 Brushed aluminium 7 Brushed aluminium C 500mm *Other finishes on request. D 600mm F 800mm F 800mm G 900mm H 1000mm I 1200mm J 1300mm K 1400mm L 1500mm M 1800mm N 2000mm N 2000mm Q 2300mm P 2500mm Q 2800mm R 3000mm R 3000mm P 2500mm Q 2800mm R 3000mm R 3000mm P 36 W/m 800Lm/m 120LED/m S2216 CRI>90 F 36 G C 500mm CRI>90 F 36 G C 6 G CRI>90 CRI>90 C 700mm CRI>90 CRI>90 C 6 G CRI>90 CRI>90 C 700mm CRI>90 CRI>90 <t< th=""></t<>

www.nanoledlighting.com 177