


LINE 5CV-CASAMBI CONTROL UNIT

Five-channel control unit with ON/OFF and DIMMER function in 12Vdc or 24Vdc constant voltage for monochrome, dynamic white, RGB or RGBW LEDs. Control system via two normally open buttons. Can be installed in unshielded indoor environments. The system can be expanded with the use of the DLA-1224-4CV amplifier. Active memory function. Using the CASAMBI application, it is possible to make simple brightness adjustments right up to more complex lighting control systems, thanks to the creation of multiple scenes, animations, timers, daylight controls, etc.

Power supply voltage: $V_{in} = V_{out} - 12/24/48Vdc$

Output current: 12A - 12/24/48Vdc

Power rating: 144W@12Vdc - 288W@24Vdc - 576W@48Vdc

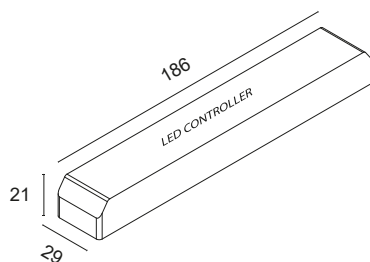

EXAMPLE OF RGBW LED STRIP CONTROL

