MINI-1CV-CASAMBI control unit




One-channel control unit with ON/OFF and DIMMER function in 12Vdc or 24Vdc constant voltage for monochrome LEDs. CASAMBI control system or via a normally open button. Can be installed in unshielded indoor environments. Active memory function. Using the CASAMBI application, it is possible to make simple brightness adjustments right up to more complex lighting control systems, thanks to the creation of multiple scenes, animations, timers, daylight controls, etc.

Power supply voltage: Vin = Vout - 12/24Vdc


Output current: 12A - 12/24Vdc

Power rating: 144W@12Vdc - 288W@24Vdc





EXAMPLE OF MONOCHROME LED STRIPS CONTROL

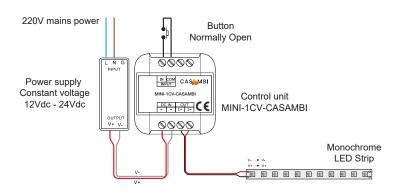

www.nanoledlighting.com 259