



# C2

Small-size anodized aluminium 6060 extruded profile, ideal to be flush-mounted even on thin surfaces or surface mounting on flat surfaces. Extremely easy to install, thanks to the snap-in diffuser, and the flush-mounted side supports. Required for the correct dissipation of LED strips, and recommended for alcove, under-wall cupboard, shelf and display case lighting.

 EXTRUDED IN ITALY


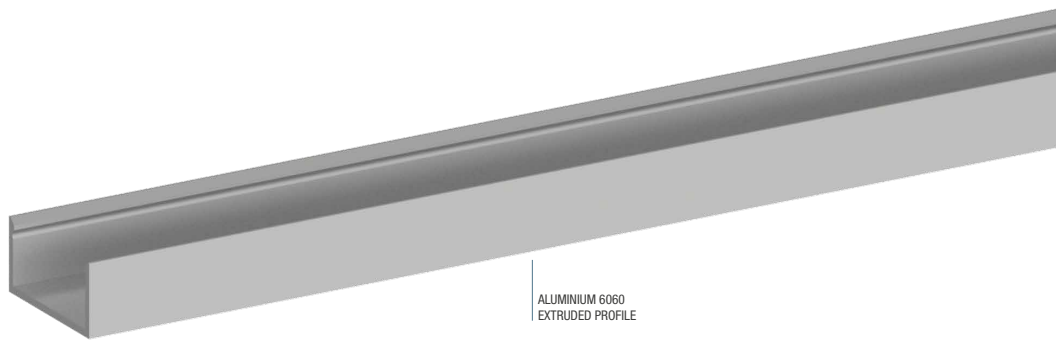




BASIC CODES  
**PA.C2.**

LENGTH  
**1** 1000mm  
**2** 2000mm  
**3** 3000mm


FINISHES  
 **1** Matt white RAL9003  
 **2** Matt black RAL9005  
 **7** Brushed aluminium



BASIC CODES  
**SC2.**

FINISHES  
 **1** White  
 **2** Matt black  
 **7** Brushed aluminium


Side closing support. Made of aluminium. Easy and quick to install, by exerting a slight side pressure.



BASIC CODES  
**PA.20X10.**

LENGTH  
**1** 1000mm brushed  
**2** 2000mm brushed  
**3** 3000mm brushed

Brushed snap-on diffuser. The diffuser can be easily removed for maintenance operations.



BASIC CODES  
**TC02**

Rectangular electronic device with ON/OFF TOUCH system. The LED can be switched ON/OFF by gently touching the sensitive device section. To be installed inside the profile, in contact with the diffuser, with the double-sided tape supplied (12Vdc and 24Vdc 4A max.)

Code example: C2 Profile + 1000mm Length + Brushed Aluminium Finish = Code: PA.C2.17