
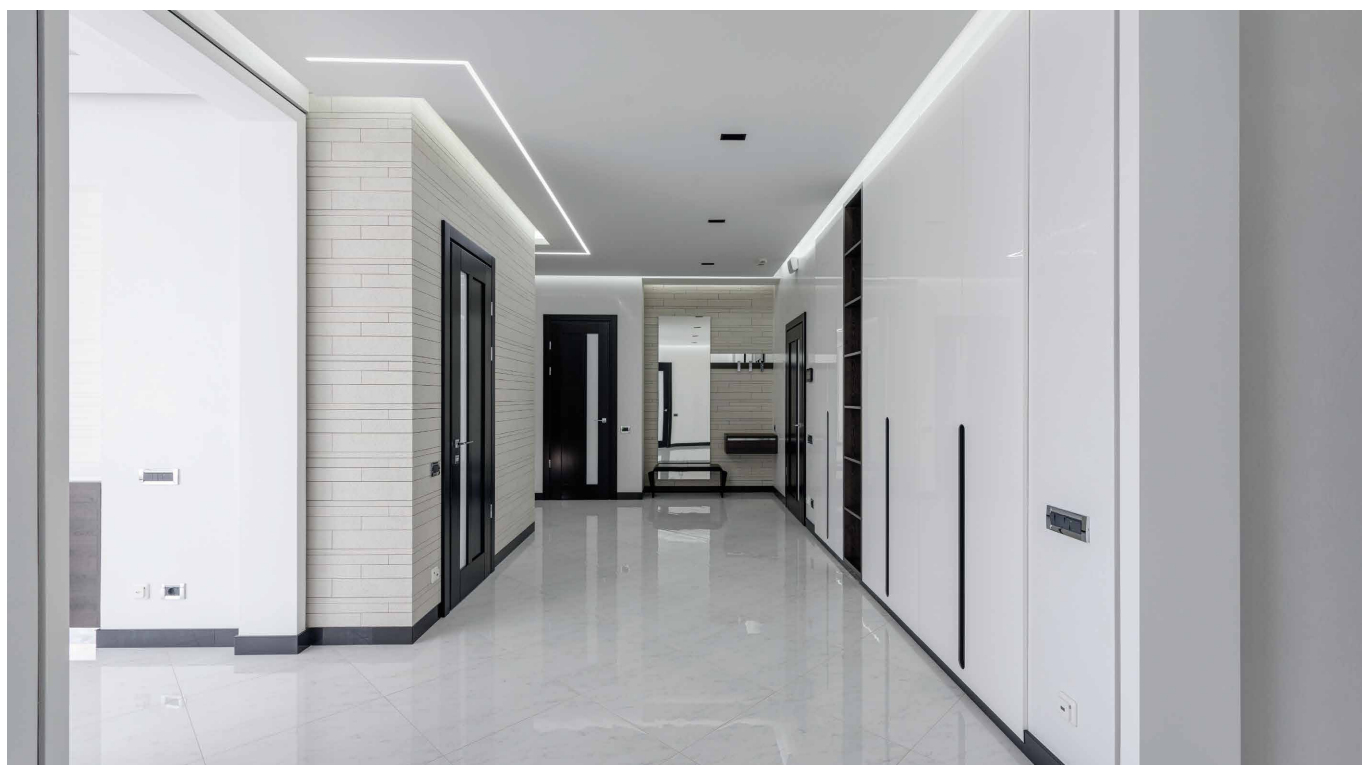



RASO

Anodised aluminium 6060 extruded profile with direct emission light output, ideal for flush-mounting on plasterboard. Extremely easy to install, thanks to the reinforced and knurled fixing flaps for improved grip, the snap-in diffuser, and the flush-mounted side supports. Necessary to dissipate the LED Strips correctly, and ideal for extended and even light beams.

 EXTRUDED IN ITALY

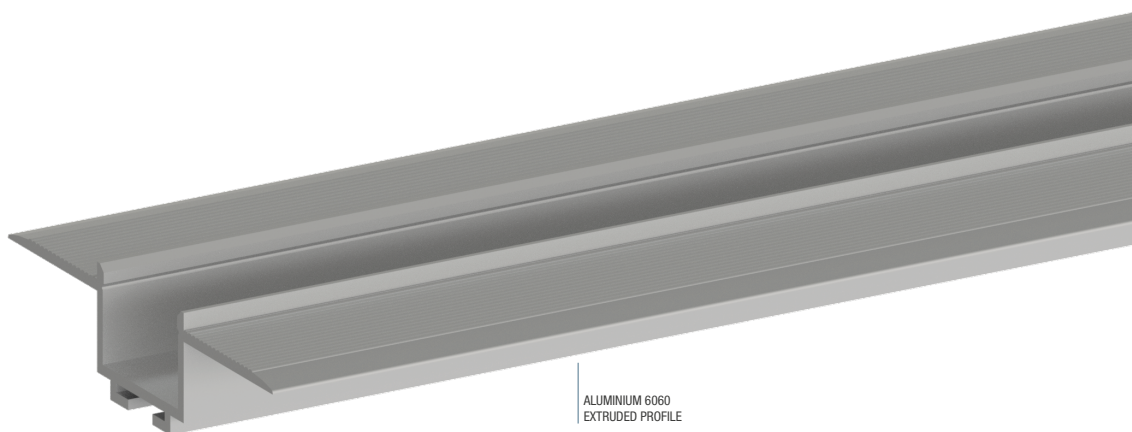

1:1 SCALE

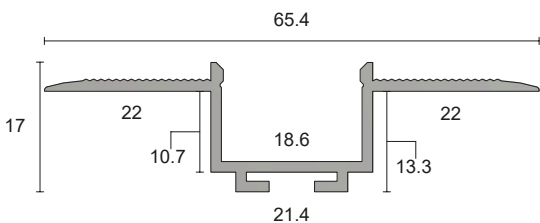

BASIC CODES


PA.RASO.

LENGTH

- 1 1000mm
- 2 2000mm
- 3 3000mm

FINISHES

- 1 Matt white RAL9003
- 2 Matt black RAL9005
- 7 Brushed aluminium

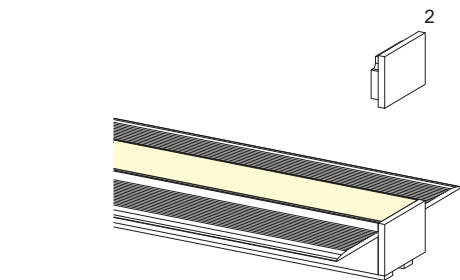


BASIC CODES

SP01.

FINISHES

- 1 White
- 2 Matt black
- 7 Brushed aluminium

Side aluminium closing support. Easy and quick to install, by exerting a slight side pressure.

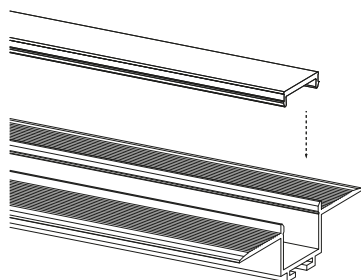

BASIC CODES


PA.20PE10.

LENGTH

- 1 1000mm brushed
- 2 2000mm brushed
- 3 3000mm brushed

- 1M 1000mm microprismatic
- 2M 2000mm microprismatic
- 3M 3000mm microprismatic

Brushed or microprismatic snap-on diffuser. The diffuser can be easily removed for maintenance operations.



BASIC CODES

PA.20PE10.R

LENGTH

- 10 10-meter brushed

Brushed snap-on diffuser. The diffuser can be easily removed for maintenance operations. Provided in 10-meter reels with protective film.

Code example: RASO Profile + 1000mm Length + Brushed Aluminium Finish = Code: PA.RASO.17