


RASO

RS.

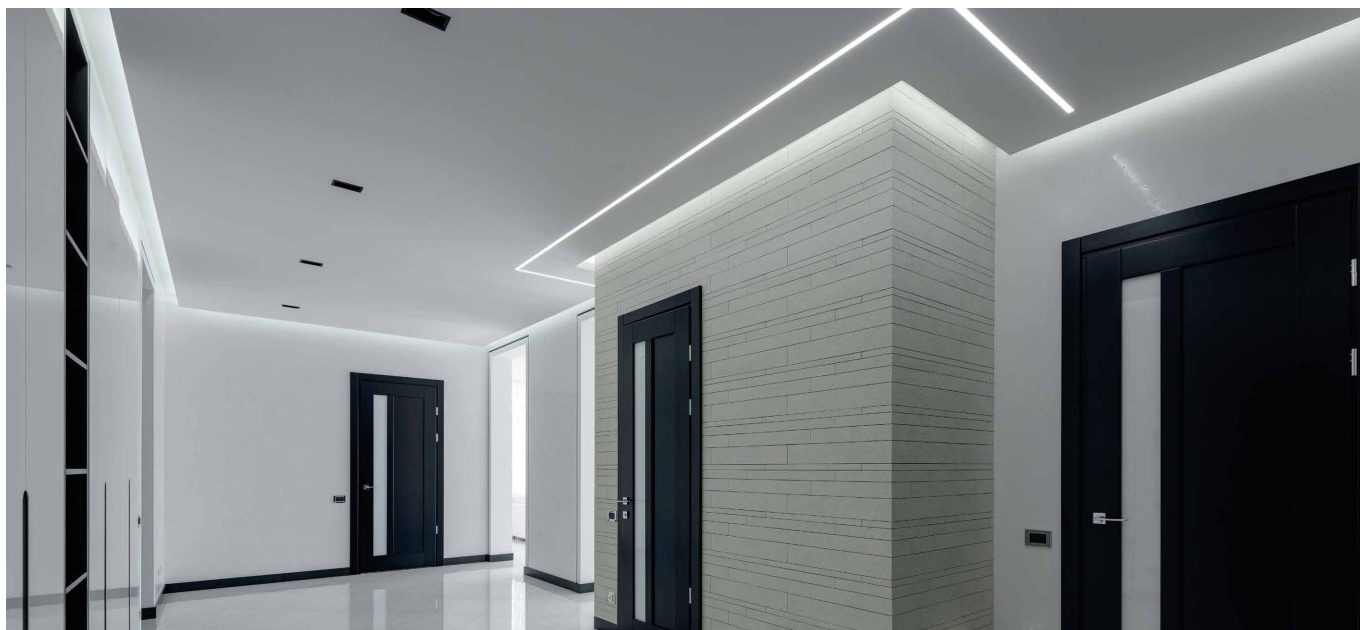

Decorated anodised aluminium lamp complete with brushed or microprismatic diffuser and high-brightness LED source with a high Lumen/Watt ratio. Suitable for primary residential, retail, large-space and general lighting. Flush-mounted installation onto plasterboard, also supplied with non-returnable cover for plastering.

Constant 24Vdc voltage supply
Parallel connection, 50 cm cable



Constant voltage power supplies page 237

Dimming Accessories page 249

 **MADE IN ITALY**



Max. milling cut 22mm

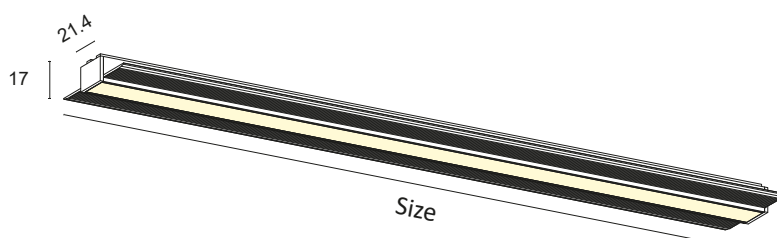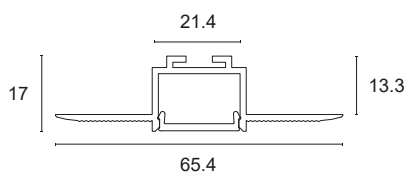

BASIC CODES

RS.

FINISHES

- 1** White
 - 2** Matt black
 - 7** Brushed aluminium
- *Other finishes on request.

SIDE SUPPORTS

- 1** White
- 2** Matt black
- 7** Brushed aluminium

SIZE

- A** 300mm
- B** 450mm
- C** 500mm
- D** 600mm
- E** 700mm
- F** 800mm
- G** 900mm
- H** 1000mm
- I** 1200mm
- J** 1300mm
- K** 1400mm
- L** 1500mm
- M** 1800mm
- N** 2000mm
- O** 2300mm
- P** 2500mm
- Q** 2800mm
- R** 3000mm

LED COLOUR

- BN** 4000K
 - BC** 3000K
 - CC** 2700K
- *Strip also available coloured, Dynamic White, RGB and RGBW.

POWER

E	16.8W/m	2000Lm/m	140LED/m	S2835	CRI>85	
E+	16.8W/m	2000Lm/m	140LED/m	S2835	CRI>90	
F	20.2W/m	2500Lm/m	168LED/m	S2835	CRI>85	
F+	20.2W/m	2500Lm/m	168LED/m	S2835	CRI>90	
G	25W/m	3500Lm/m	160LED/m	S2835	CRI>80	
L+	28W/m	3500Lm/m	160LED/m	S2835	CRI>90	
H	30W/m	4500Lm/m	240LED/m	S2835	CRI>80	

*Energy class referring to light source

DIFFUSER

- M** MICROPRISMATIC
- S** BRUSHED

Code example:

RASO + White + Side supports white + 1000mm + 3000K + 25W/m CRI>80 + Brushed diffuser = Code: RS.11HBCGS