REFLEX







Decorated anodised aluminium lamp complete with brushed diffuser and indirect emission, high-brightness LED source with a high Lumen/Watt ratio. Suitable for accent and service lighting, suitable for furnishing, residential, retail and general lighting. Flush-mounted

Constant 24Vdc voltage supply Parallel connection, 50 cm cable

Constant voltage power supplies page 237 Dimming Accessories page 249



















Max. milling cut 23mm



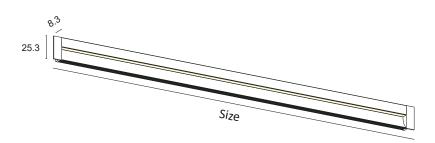



BASIC CODES **FINISHES** SIDE SUPPORTS SIZE LED COLOUR __ 1 White ☐ 1 White ■ BN 4000K X1. 300mm Α **2** Matt black **2** Matt black ■ **BC** 3000K В 450mm **7** Brushed aluminium **7** Brushed aluminium C 500mm **CC** 2700K *Other finishes on request. D 600mm Ε 700mm 800mm G 900mm Н 1000mm 1200mm 1300mm 1400mm 1500mm L M 1800mm N 2000mm 0 2300mm 2500mm Q 2800mm 3000mm **POWER** DIFFUSER **N+** 9.6W/m 800Lm/m 120LED/m S2216 CRI>90 BRUSHED **0+** 12W/m 1000Lm/m 300LED/m S2216 CRI>90 **P+** 14.4W/m 1100Lm/m 180LED/m S2216 CRI>90

*Energy class referring to light source

www.nanoledlighting.com 127