RHO 3








Decorated anodised aluminium lamp complete with press-fit brushed or microprismatic diffuser, side supports and LED source with a high Lumen/Watt ratio. Suitable for furnishing lighting and general lighting.

Mounting with screw clips.

Constant 24Vdc voltage supply Parallel connection, 50 cm cable

Constant voltage power supplies page 237 Dimming Accessories page 249



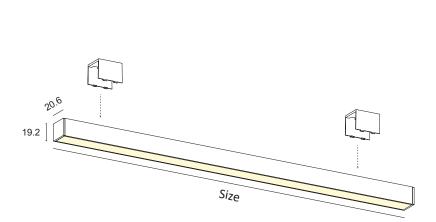

154 www.nanoledlighting.com



BASIC CODES **FINISHES** SIDE SUPPORTS SIZE LED COLOUR 1 White ☐ 1 White 500mm ■ BN 4000K C R3. 2 Matt black **2** Matt black D 600mm ■ **BC** 3000K **7** Brushed aluminium **7** Brushed aluminium Ε 700mm CC 2700K *Other finishes on request. F 800mm *Strip also available coloured, Dynamic White, G 900mm RGB and RGBW. Н 1000mm 1200mm 1300mm 1400mm L 1500mm M 1800mm N 2000mm 0 2300mm 2500mm 2800mm 0 3000mm POWER DIFFUSER **E** 16.8W/m 2000Lm/m 140LED/m S2835 CRI>85 D MICROPRISMATIC BRUSHED **E+** 16.8W/m 2000Lm/m 140LED/m S2835 CRI>90 2500Lm/m 168LED/m S2835 CRI>85 20.2W/m **F+** 20.2W/m 2500Lm/m 168LED/m S2835 CRI>90 Ε

D

4500Lm/m 240LED/m S2835 CRI>80
*Energy class referring to light source

3500Lm/m 160LED/m S2835 CRI>80

3500Lm/m 160LED/m S2835 CRI>90

25W/m

L+ 28W/m

H 30W/m

G

Code example:

www.nanoledlighting.com 155