



SMD2835 CRI>90 24V 20.2W/m Lumen/m 2100 - 2500

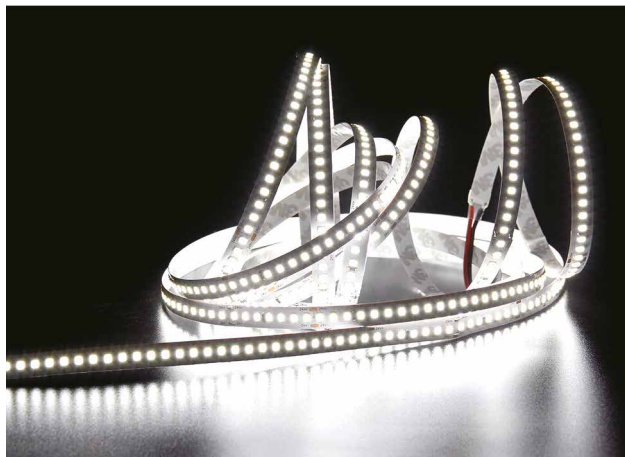


Measurements

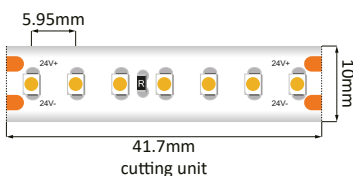

IP20
10
I 2



Photometric Data

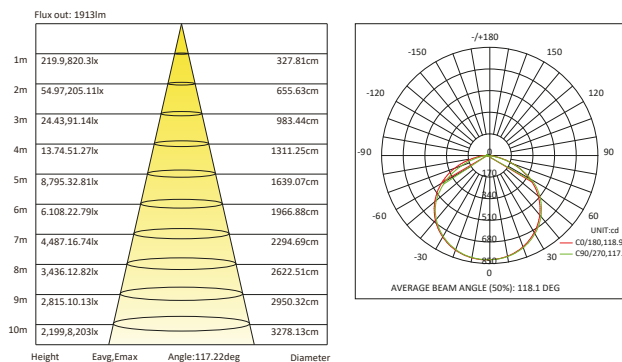

Features

- 5-metre LED SMD2835 reel on flexible PCB and 3M professional adhesive
- Single BIN LED selection with 3SDCM
- CRI>90
- Dimmable with various control systems
- Efficiency above 150lm/W
- 2100 - 2500lm/m

Code

| Code | Colour | IP rating |
|--------------|--------|-----------|
| S2835.CC323+ | 2700K | IP20 |
| S2835.BC323+ | 3000K | IP20 |
| S2835.BN323+ | 4000K | IP20 |

Parameters

| | |
|-----------------------|-----------------------|
| Power | 20.2W/m |
| Voltage | DC 24V |
| LED/m | 168pcs/m |
| LED colour (CCT) | 2700K - 3000K - 4000K |
| Current | 0.72A/m |
| Rating | IP20 |
| Emission angle | 120° |
| Operating temperature | -20°C ~ +55°C |