



# SMD4040 RGB 24V 15W/m

## Lumen/m 300



### Measurements

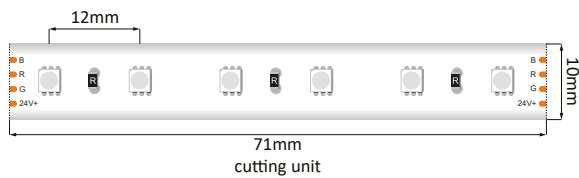


### Features

- 5-metre LED SMD4040 reel on flexible PCB and 3M professional adhesive
- Single BIN LED selection with 3SDCM
- Dimmable with various control systems
- 300lm/m

### Parameters

Power	R 5W/m - G 5W/m - B 5W/m - RGB 15W/m
Voltage	DC 24V
LED/m	84pcs/m
LED colour (CCT)	RGB
Corrente	R 0,24A/m - G 0,24A/m - B 0,24A/m - RGB 0,72A/m
Rating	IP20 - IP54 - IP65
Emission angle	120°
Operating temperature	-20°C ~ +55°C

### Photometric Data

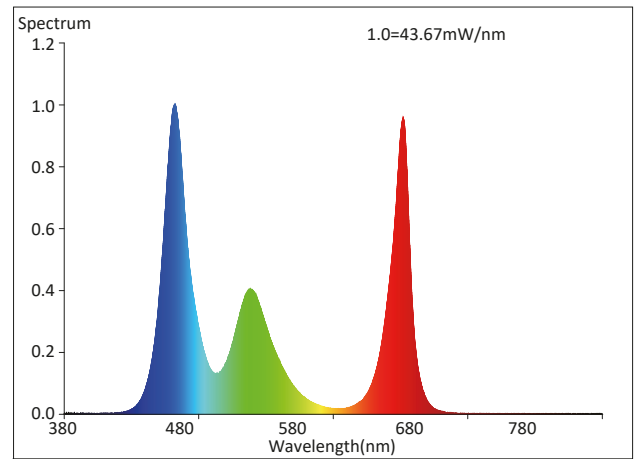

Code	Colour	IP rating
S4040.RGB	RGB 300 lm/m	IP20
S4040.54.RGB	RGB 300 lm/m	IP54
S4040.65.RGB	RGB 300 lm/m	IP65