


# TAU

T1.

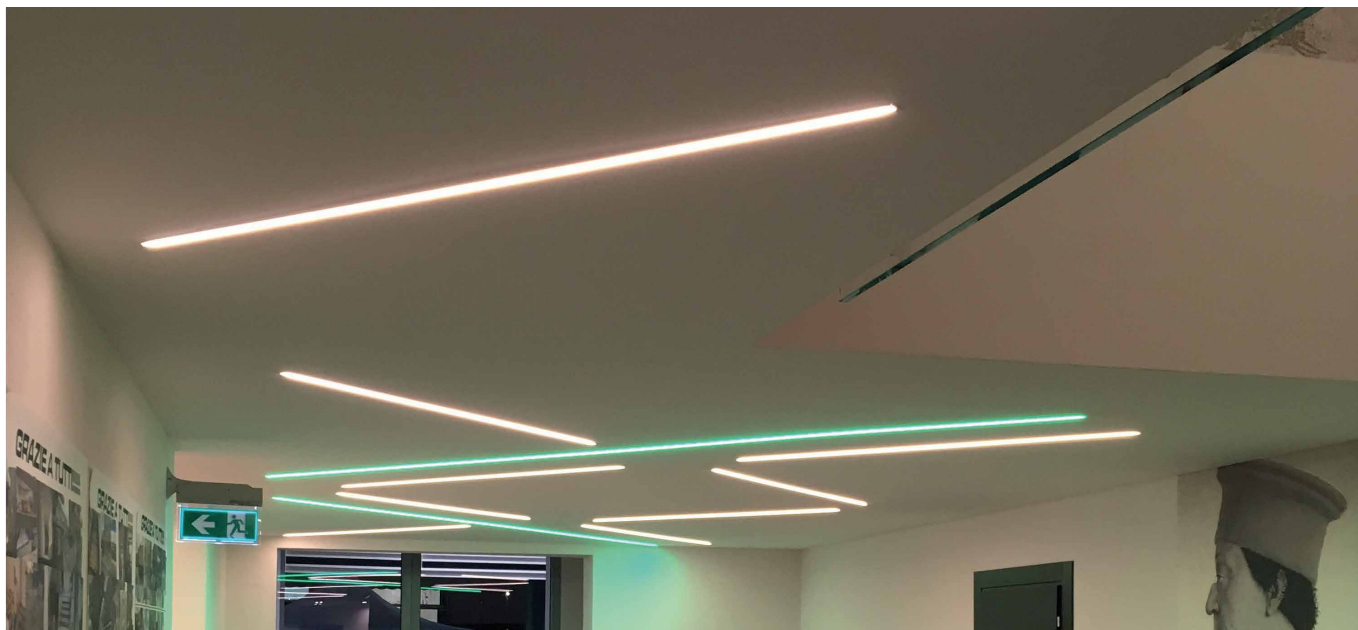


Decorated anodised aluminium lamp complete with brushed or microprismatic diffuser and high-brightness LED source with a high Lumen/Watt ratio. Suitable for primary residential, retail, large-space and general lighting. Flush-mounted



Constant 24Vdc voltage supply  
Parallel connection, 50 cm cable

Constant voltage power supplies page 237  
Dimming Accessories page 249

 **MADE IN ITALY**

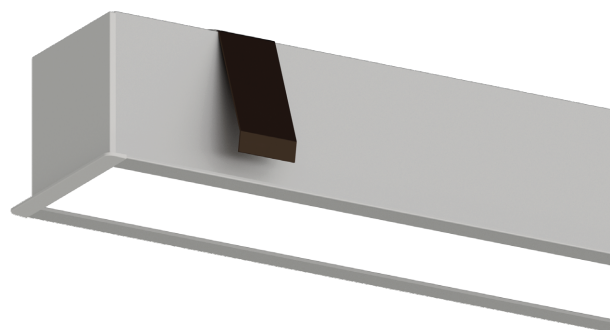

Max. milling cut 38.3mm

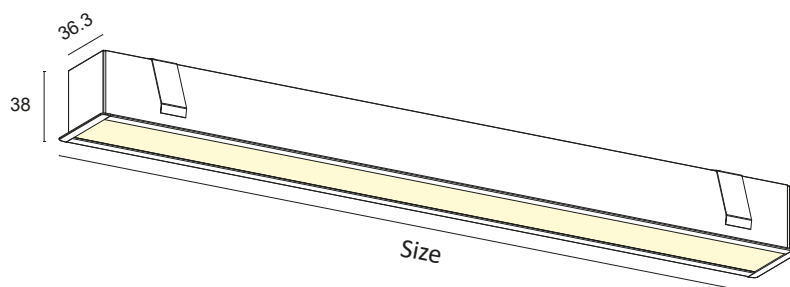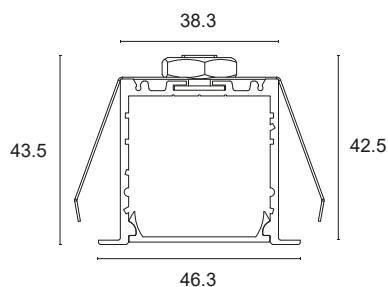

BASIC CODES

**T1.**

FINISHES

- 1** White
  - 2** Matt black
  - 7** Brushed aluminium
- \*Other finishes on request.

SIDE SUPPORTS

- 1** White
- 2** Matt black
- 5** Grey
- 7** Brushed aluminium

SIZE

- C** 500mm
- D** 600mm
- E** 700mm
- F** 800mm
- G** 900mm
- H** 1000mm
- I** 1200mm
- J** 1300mm
- K** 1400mm
- L** 1500mm
- M** 1800mm
- N** 2000mm
- O** 2300mm
- P** 2500mm
- Q** 2800mm
- R** 3000mm

LED COLOUR

- BN** 4000K
  - BC** 3000K
  - CC** 2700K
- \*Strip also available coloured, Dynamic White, RGB and RGBW.

POWER

- |           |         |          |          |       |        |   |
|-----------|---------|----------|----------|-------|--------|---|
| <b>F</b>  | 20.2W/m | 2500Lm/m | 168LED/m | S2835 | CRI>85 |    |
| <b>F+</b> | 20.2W/m | 2500Lm/m | 168LED/m | S2835 | CRI>90 |    |
| <b>G</b>  | 25W/m   | 3500Lm/m | 160LED/m | S2835 | CRI>80 |   |
| <b>L+</b> | 28W/m   | 3500Lm/m | 160LED/m | S2835 | CRI>90 |  |
| <b>H</b>  | 30W/m   | 4500Lm/m | 240LED/m | S2835 | CRI>80 |  |
| <b>M+</b> | 40W/m   | 5000Lm/m | 480LED/m | S2835 | CRI>90 |  |

\*Energy class referring to light source

DIFFUSER

- M** MICROPRISMATIC
- S** BRUSHED

Code example:

TAU + White + Side supports white + 1000mm + 3000K + 25W/m CRI>80 + Brushed diffuser = Code: T1.11HBCGS