

YPSILON FLOOR LIGHT

Y3.



Decorated anodised aluminium lamp complete with floor-fitting brushed or transparent diffuser and high-brightness LED source with a high Lumen/Watt ratio. Suitable for primary residential, retail, large-space and general lighting. The interlocking profile mechanism allows for easy maintenance. Flush fitting in plasterboard, brickwork or floor.



Constant voltage supply 24Vdc
Parallel connection, 50 cm cable

Constant voltage power supplies page 237
Dimming Accessories page 249

 **MADE IN ITALY**



*On request IP54 or IP65

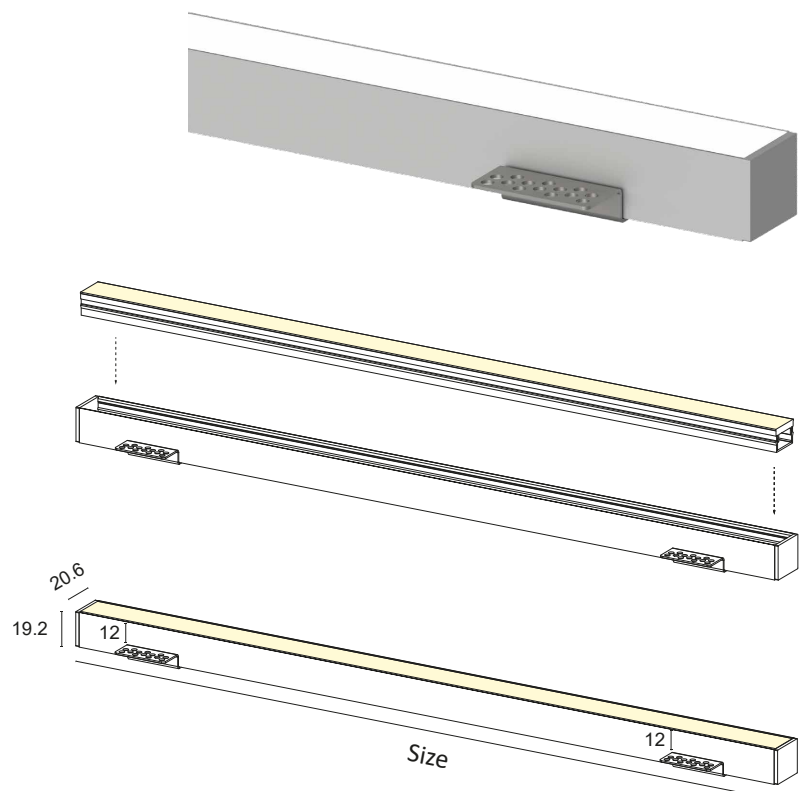

BASIC CODES

Y3.

FINISHES

- 1** White
 - 2** Matt black
 - 7** Brushed aluminium
- *Other finishes on request.

SIDE SUPPORTS

- 1** White
- 2** Matt black
- 7** Brushed aluminium

SIZE

- D** 600mm
- E** 700mm
- F** 800mm
- G** 900mm
- H** 1000mm
- I** 1200mm
- J** 1300mm
- K** 1400mm
- L** 1500mm
- M** 1800mm
- N** 2000mm
- O** 2300mm
- P** 2500mm
- Q** 2800mm
- R** 3000mm

LED COLOUR

- BN** 4000K
 - BC** 3000K
 - CC** 2700K
- *Strip also available coloured, Dynamic White, RGB and RGBW.

POWER

IP65	D65	10W/m	1400Lm/m	98LED/m	S2835	CRI>85	
IP54	E54	16.8W/m	2000Lm/m	140LED/m	S2835	CRI>85	
	E	16.8W/m	2000Lm/m	140LED/m	S2835	CRI>85	
	E+	16.8W/m	2000Lm/m	140LED/m	S2835	CRI>90	
	F	20.2W/m	2500Lm/m	168LED/m	S2835	CRI>85	
	F+	20.2W/m	2500Lm/m	168LED/m	S2835	CRI>90	

*Energy class referring to light source

DIFFUSER

- S** BRUSHED

Code example:

YPSILON FLOOR LIGHT + White + Side supports white + 1000mm + 3000K + 20.2W/m CRI>85 + Brushed diffuser = Code: Y3.11HBCFS